


**It's fast,
it's resistant,
it's PRATIKO®**

**The best solution for a high security
fixing system and fixtures**

Advantages

- Single body collar with vulcanized rubber
- Thanks to the vulcanization of the rubber, the latter does not slip off
- Time-saving installation
- Collar meeting DIN 4109 requirements
- It also meets requirements in terms of peak sound pressure (30 dB) in waste water systems

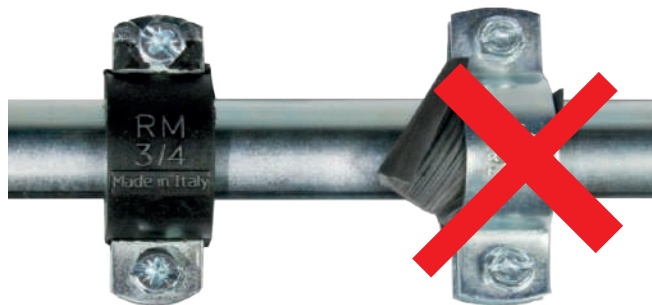

↑
YES

Rubber ring perfect hold
no sliding

↑
NO

Ring with poor hold
possible sliding

TECHNICAL DATA:



- **351/G Collars Pratiko®** for pipe clamping with rubber gasket from 3/8" (15 mm) to 4";
- **555/G Collars Pratiko®** for pipe clamping-spot welded nut with rubber gasket from 3/8" (15 mm) to 4".

Vulcanized rubber in EPDM hardness 55 Shore, temperature -20°/+120°C.