

BRASS BALL VALVE WITH IN BUILD FILTER

CHARACTERISTICS

Body: Brass chrome-plated

Lever handle: Steel with plastic cover

Threads: male-male ISO 228 (equivalent to DIN EN ISO 228 and BS EN ISO 228).

Working temperatures: -20°C - 100°C in absence of steam.

APPLICATION:



Suitable for domestic water services,
heating and air-conditioning plants,
compressed air systems.



Material list

1	Body	Brass
2	Bonnet	Brass
3	Sealing seat	PTFE
4	Ball	Brass
5	Stem	Brass
6	Packing gland	PTFE
7	Press nut	Brass
8	Handle	Steel
9	Nut	Brass
10	Strainer	stainless steel
11	Washer	PTFE
12	Flat	Brass

DN	SIZE 1	SIZE 2	D	H	L	Strainer /micron/
15	G1/2"	G1/2"	12	85.9	77.6	700
20	G3/4"	G3/4"	15	93.1	89.4	560
25	G1"	G1"	20	101.8	98.5	800

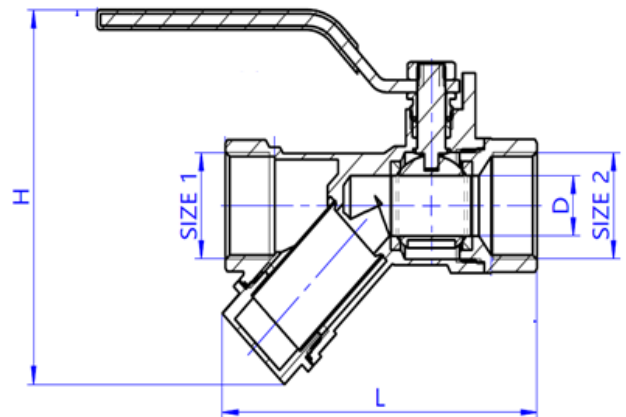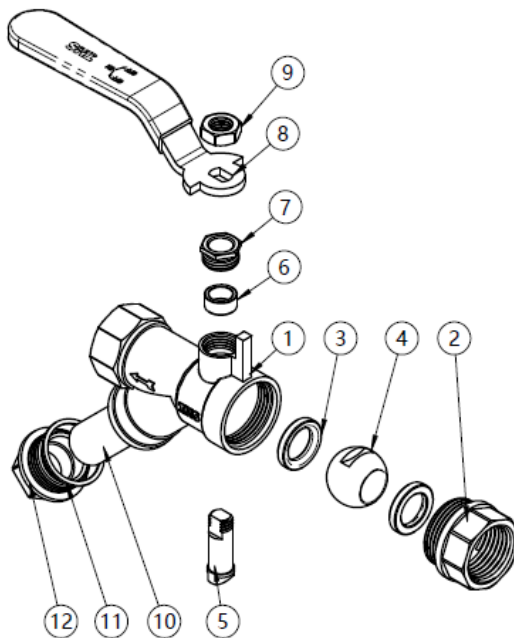

PACKING

Box

Inner Box

Single package

