

## LipuMobil-P – Type 0.8

### Product information for the product group



#### ACO Product benefits


- Suitable for flow rates up to 0.8 l/s
- Optional set of wheels for transportation
- Optional extraction valve for tank discharge

- Applications:
  - Mobile snack bars
  - Mobile dishwashers
  - Occasional meal preparation
- For free-standing installation in frost-proof areas, odour-proof sealed, with removable cover and fastening ring
- Inlet and outlet DN 50 (OD 50 mm) for connection with fitting pipe systems
- Total volume: 48 liters
- Grease storage volume: 15 liters
- Sludge storage volume: 16 liters
- Optionally with grease storage tank from PE, mounted at the separator, with discharge pump, volume 10 liters
- German approval Z-54.6-546 (valid only in Germany)
- Type test report for flow rate (NS): 60143586-001
- Suitable for flow rates up to 0.8 l/s

### Item Technical Data 3700.04.00

	Nominal width	Contents			Weight		
		Sludge trap [l]	Grease store [l]	Overall [l]	Empty [kg]	Full [kg]	
Without grease storage tank							
	DN 50	16	15	48	Without grease storage tank	8	60

## Dimensions

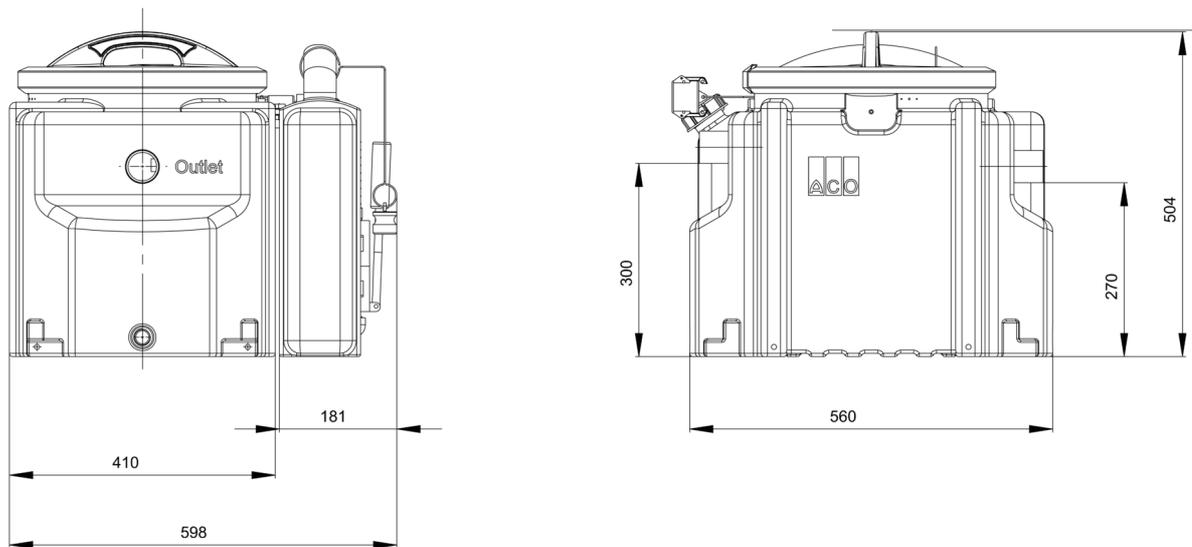

## Accessories

	Description	Used with	Description	Item number
	Inlet valve DN 50	<ul style="list-style-type: none"> <li>LipuMobil-P 0,8</li> <li>Muli-Mini</li> </ul>	<ul style="list-style-type: none"> <li>Made of PVC</li> <li>DN 50</li> <li>With sealing ring as per DIN EN 19538</li> <li>Weight: 0.4 kg</li> </ul>	<b>0175.18.33</b>
	Set of wheel	<ul style="list-style-type: none"> <li>LipuMobil-P 0,8</li> </ul>	Set of wheel, consisting of four wheel, two of them with fastener for tank fixation	<b>3700.04.30</b>
	Extraction valve	<ul style="list-style-type: none"> <li>LipuMobil-P 0,8</li> </ul>	<ul style="list-style-type: none"> <li>Extraction valve of plastics for tank discharge</li> </ul>	<b>3700.04.40</b>

You can find further accessories under → <https://www.buildingdrainage.aco/suche/?q=3700.04.00>