

Receiver
From

Company
Reference
Address
Phone
Fax
E-mail

Item no.

60195632H

Customer pos. no.:
Model:

NOVA 180 M-NA 40th - 10m

Pump data

Free passage : 5 mm
Aspiration level minimum : 8 mm
Max. immersion depth : 7 m
Min. fluid temperature : 0 °C
Max. fluid temperature : 35 °C

Requested data



Flow :
Head :
Fluid : Water
Fluid Temperature : 20 °C
Density : 998.3 kg/m³
Kinematic viscosity : 1.005 mm²/s
Dampspanning : 2.34 kPa

Hydraulic data (duty point)

Flow :
Head :

Materials

Pump body : Technopolymer
Impeller : Technopolymer
O-Ring : NBR Rubber
Rotor shaft : Stainless Steel AISI 431
Suction strainer : Technopolymer
Motor top body : AISI 304 X5 Cr Ni 1810 UNI 6900/71

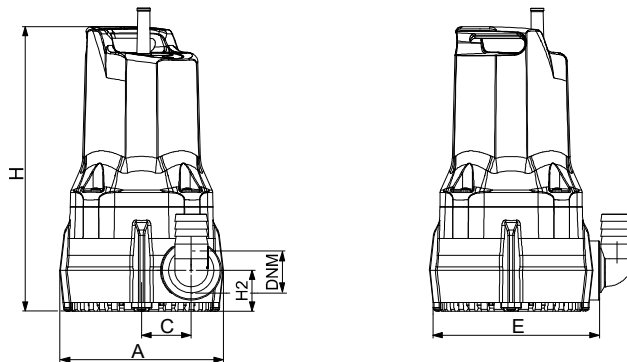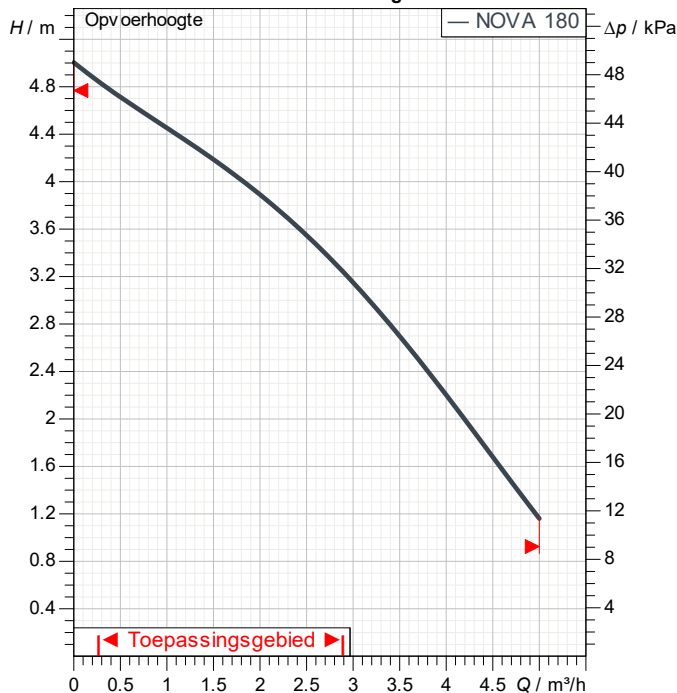Curve tolerance according to ISO 9906

Motor data

Merk : DAB
Nominal power P2 : 0.2 kW
Rated voltage : 1~ 230 V
Nominal current : 0.9 A
Degree of protection : IP 68
Cable length m : 10

Gewicht: 4.6 kg

Dimension mm

A	151				
C	46				
DNM	1"1/4 G				
E	158				
H	268				
H2	38				

Pump connection

Suction side : /
Discharge side : 1" 1/4 GAS / --


Receiver

From

Company
Reference
Address
Phone
Fax
E-mail

NOVA 180 M-NA 40th - 10m

Curve tolerance according to ISO 9906

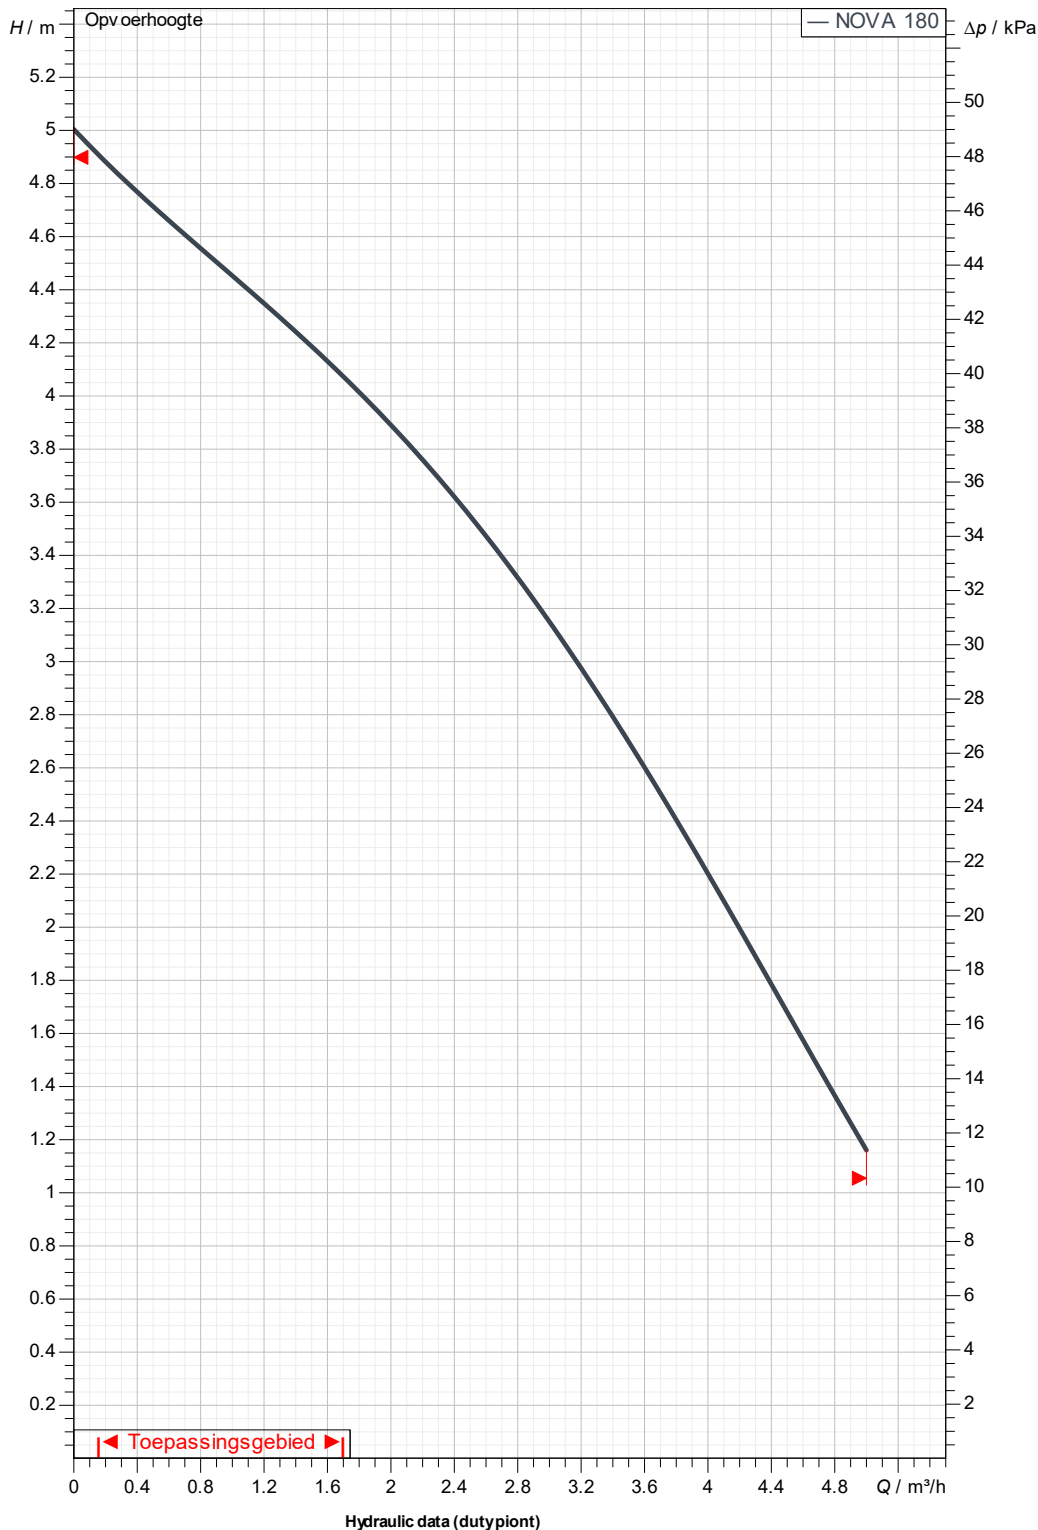

Suction side

Discharge side
1" 1/4 GAS
--

Flow :

Head :

Rated speed:
2900 1/min

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_ID

OWNER_

ISSUE_DATE

2025-07-11



DIMENSIONAL DRAWING

2025-07-11

Pagina 3 / 3


DAB PUMPS S.p.A.
Via Marco Polo, 14 - 35035 Mestrino (PD), Italy
Tel. +39 049 5125000 - Fax +39 049 5125950
www.dabpumps.com

Receiver

From

Company
Reference
Address
Phone
Fax
E-mail

NOVA 180 M-NA 40th - 10m

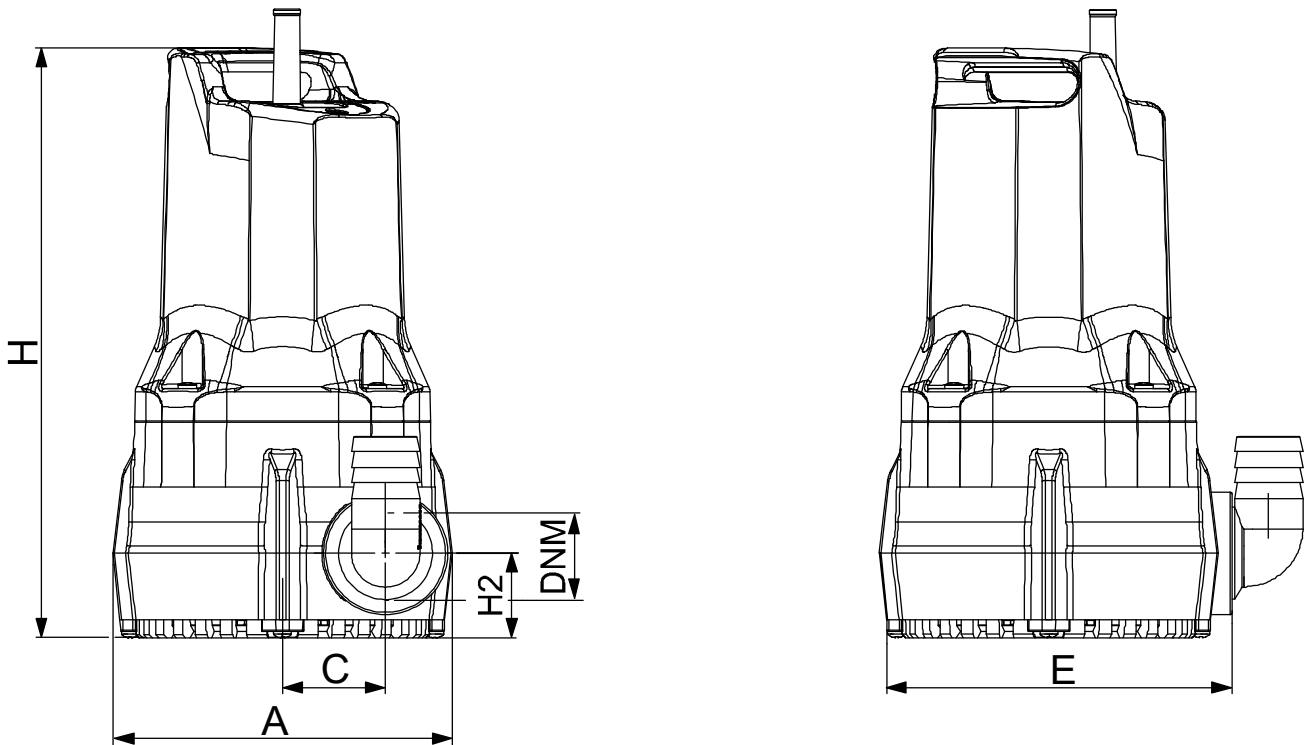

Dimensions in mm

Pump connection

1	A	151								
2	C	46								
3	DNM	1"1/4 G								Suction
4	E	158								
5	H	268								Discharge
6	H2	38								1" 1/4 GAS
7										--
8										
9										
10										
11										

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_ID

OWNER_

ISSUE_DATE

2025-07-11