

Perfect for residential projects, the indoor HC controller provides smart water savings and remote irrigation management capabilities.

## **KEY BENEFITS**


- Number of stations:
  6 or 12 (fixed indoor)
- Standard programming option allows for 6 independent irrigation programs and 6 start times per program
- Advanced programming option provides station-based programming with up to 6 total start times available
- 24-hour maximum station run time provides flexibility for low-flow zones
- 2 sensor inputs available for use with any Clik sensors and HC Flow Meter
- Station outputs can also be used to activate a pump start relay or master valve
- · Wi-Fi enabled for quick connection to Hydrawise software
- 7 cm full-colour touchscreen display for simple programming at the control panel
- Built-in milliamp sensor for wire fault detection and alerts (12-station model only)

## **OPERATING SPECIFICATIONS**

- Transformer input: 120 VAC or 230 VAC
- Transformer output (24 VAC): 1 A
- Station output (24 VAC): 0.56 A
- P/MV output (24 VAC): 0.28 A
- · Approvals: UL, cUL, FCC, CE, RCM
- · Warranty period: 2 years

## **USER-INSTALLED OPTIONS**

 Wireless HC Flow Meter option permits wireless flow monitoring for Hydrawise enabled systems

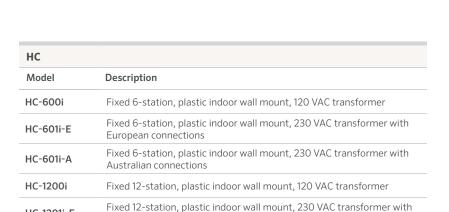

Fixed 12-station, plastic indoor wall mount, 230 VAC transformer with



#### HC

(plastic indoor) Height: 15.2 cm Width: 17.8 cm Depth: 3.3 cm

# Compatible with:







**HC Flow Meter** 

Rain-Clik Sensor

Soil-Clik Sensor



## **Smart WaterMark**

Recognised as a responsible water-saving tool



European connections

Australian connections

HC-1201i-E

HC-1201i-A