

Smart Installation

vanwalraven.com

van Walraven



MÜCHER EPDM Coupling Genius

Multi-flexible coupling up to 2.5 bar water pressure. Integrated flaps fold outward or inward. ETA-09/0248. Ideal for connecting pipes of different diameters and materials. Available in various sizes.

- Applicable at temperatures from -40 °C to 120 °C
- Stainless steel 304 hose clamps

Articlenumber: 131487 t/m 131492



MÜCHER Flexible Straight EPDM Coupling

Ideal for connecting pipes of different diameters and materials. DIN EN 295-4 ETA-09/0248.

- Applicable at temperatures from -40 °C to 120 °C
- Stainless steel 304 hose clamps
- Up to 0.6 bar
- Available in various sizes

Articlenumber: 131482 t/m 131486



MÜCHER Flexible EPDM Extension Coupling

Ideal for connecting pipes of different diameters and materials. Applicable at temperatures from -40 °C to 120 °C.

- Heavy-duty stainless steel 304 hose clamps
- Available in various sizes
- Custom sizes available on request

Articlenumber: 131302 t/m 131479



GEBERIT PVC Offset Bend 90/110

Ideal when replacing a floor-mounted toilet with a wall-hung toilet.

- Oval design for maximum flow with a maximum height of 72 mm
- Variable center distance from 14.5 to 34.5 cm
- Connection 90 for concealed cistern; 110 fits a standard 110 mm floor drain

Articlenumber: 131560



GEORG FISCHER UNI-GRIP S Coupling

Ideal for easily connecting metal piping systems.

- High-quality stainless steel
- Temperature range -20 °C to +80 °C

Articlenumber: 176982



GEBERIT Wall Closet Bend 90 mm

Complete with 50/40 branch for connecting a washbasin.

Right
Articlenumber181294
Left
Articlenumber181295

Shutoff Inspection Point 54 × 110/125/160 mm

Simple shutoff for an inspection point in PVC pipe 110, 125 and 160 mm. Drilled hole size 54 mm.

Articlenumber: 131360



Temporary Rainwater Drain, PE Hose

Useful when gutters and outlets are installed during construction and the final downpipe has not yet been placed. The temporary drain prevents dirt marks and splashing on the facade. The bricklayer is not hindered by a fixed pipe. Suitable for single or repeated use.

- Length 100 meters

Articlenumber: 130846





PP Eccentric In-Pipe Reducer

Solution to reduce to a pipe cut off in the floor. In-pipe mounting. Available in various sizes. Not suitable for thick-walled pipe 75 (only for article number 130865).

Articlenumber: 130865



AIRFIT
PVC In-Pipe Reducer

Solution to reduce to a pipe cut off in the floor. In-pipe mounting.

110 MV x 75 MV
Articlenumber: 130871
110 MV x 90 MV
Articlenumber: 130872



AIRFIT
PP Repair T-Piece 110 mm

Fits inside PVC pipe 110. The T-piece includes a repair section.

Articlenumber: 130869

GEORG FISCHER
MULTI/JOINT

For pipes that differ in age and diameter. These couplings create strong, tensile-resistant connections between many types of pipe. MULTI/JOINT enables flexible couplings between DN40 and DN600.

Suitable for gas and water lines. NBR version: water and gas. EPDM version: water. Maximum angular deflection at installation: 8 degrees.

Articlenumber: 130731 t/m 144048





ROTEC Diamond Disc 125 mm (Cutting and Chamfering)


Cuts and deburrs plastic pipes in a single operation. Fast, easy and time-saving with a long service life.

Articlenumber: 940666

Rod Grinder Including 2 Discs

Shortens PVC pipe quickly and easily using a standard (cordless) drill from the inside. Ideal for standing-toilet renovation or other sewer work. Also suitable for shortening a stainless steel flexible hose in hard-to-reach places. Supplied with 2 cutting discs; separate discs available (article number 940393).

Articlenumber: 940392

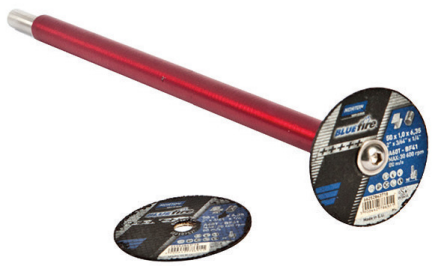



ROTEC
Tile Drill Guide Mini

Precise drilling without bit slippage. The suction cup allows quick and accurate positioning on the wall.

Articlenumber: 941202



GEBERIT
Transition Adapter to PVC

Transition from 110 mm glue spigot to 90 mm socket. For in-wall frames for wall-hung toilets, provides a handy transition from PP/PE to PVC glue. Unique product; other rubber reducers are not glueable.

Articlenumber: 130859



PIPELIFE
PP Adjustable Bend 0–88.5°

Adjustable to the required angle; ideal for difficult corners.

- Socket to spigot
- 50 mm
- White

Articlenumber: 116774



AIRFIT
PP Push-In Socket with Gasket

One side fits inside the pipe.

160 mm, concentric
Articlenumber: 130866
110 mm, eccentric
Articlenumber: 130867
110 mm, right angle
Articlenumber: 130868
125 mm, eccentric
Articlenumber: 130876

PVC Repair Glue Socket

When a pipe has broken off in concrete or a wall, this PVC glue socket provides the solution. The reduced side fits inside the pipe.

Wavin	Pipelife
32 mm	**32 mm**
Articlenumber: 101035	Articlenumber: 143801
40 mm	**40 mm**
Articlenumber: 101036	Articlenumber: 143802
50 mm	**50 mm**
Articlenumber: 101037	Articlenumber: 143803
75 mm	**75 mm**
Articlenumber: 143804	Articlenumber: 143804
110 mm	**110 mm**
Articlenumber: 101010	Articlenumber: 143806
125 mm	**125 mm**
Articlenumber: 101013	Articlenumber: 143807



Plastic Walkway with Railing



Lightweight plastic walkway with metal railings. Easy to place, remove and transport. Load capacity up to 1 ton. Can be widened quickly by inserting an extra element. Dimensions 1,700 × 1,000 mm (floor plate). Distance between railings 860 mm. Complies with DIN 4420-1.

- Anti-slip floor
- Easy to carry with sturdy handles
- Red-white reflective film on floor plate and railings
- Weight 20 kg

Articlenumber: 130731 t/m 144048

VENT-AXIA
Svara Bathroom Fan



Very quiet; highly suitable for bedrooms.

- Continuous or intermittent ventilation
- Humidity detection
- Bluetooth-supported app
- DC motor with 5-year warranty
- IP44 rating
- Light sensor with run-on time
- Universal application
- Boost function for fast extraction of polluted indoor air
- Quiet hours programmable

Articlenumber: 810363



ANKOFIT Extended
S-Coupling

Connecting piece between wall plate and tap. Ideal when the wall plate sits slightly too deep. Male thread × extended male thread (10 mm).

Articlenumber: 331159



AKATHERM
Repair Bend for Pipe Repairs

Fits inside the pipe; useful when a pipe has broken off.

- Socket/spigot (reduced)
- 87.5 gr

40x34 mm
Articlenumber: **101543**
50 x 44 mm
Articlenumber: **101544**



NICOLL
PVC Flexible Bend

Flexible fitting adjustable to any angle for an optimal result.

- Available from 32 to 50 mm in socket-socket and socket-spigot versions

Articlenumber: 101661 t/m 101673



WATECH
TNC CLIP

Ideal for hanging multiple pipes on a single threaded rod. Temperature range -40 °C to 140 °C. Available in different sizes and threaded rods, also for mounting rail. Easy to mount.

Articlenumber: 281101 t/m 281278



HPX

PowerSeal Sealing Tape Transparent

Also called Friday afternoon tape. Ideal for quickly and temporarily watertight sealing or closing seams.

- Airtight
- UV resistant
- Paintable
- Instant adhesion, no drying time
- Adheres well to uneven surfaces

Articlenumber: 610304

PENTAIR

JUNG U5KS FLOOD PROTECTION BOX IN FLUTBOX CRATE

A simple solution for high water and flooding. Place the pump with its carrying crate on the basement floor and quickly and reliably pump out the water using the fire hose.

- Type U5KS
- Material: plastic

Articlenumber: 611038





PIPELIFE

SpinnPro Chamfering Tool

For chamfering plastic pipes. Works with standard drills, electric or cordless (14 V and higher). Replaceable blade.

Articlenumber: 900132



CRAMER FUGI Mini Joint Set

For removing old sealant joints and neatly applying new joints.

Joint set 5-piece
Articlenumber: 610057
3 joint templates, without knife
Articlenumber: 609988
1 joint template, with knife
Articlenumber: 609989



AIRFIT

PVC Clamp Saddle

Suitable for retrofitting; saves two-thirds of earthworks and avoids exposing the pipe with difficulty. Includes 2 cable ties.

Articlenumber: 130875

CONVAL

WAVE Underfloor Heating Pipe PE-RT

Coil supplied with black film and cardboard inner core to prevent tangling and damage or degradation from sunlight. Very easy to uncoil.

diff. tight 16x2, 120 meter
Articlenumber: 177163 **diff.**
tight 16x2, 200 meter
Articlenumber: 177162 **diff.**
tight 16x2, 600 meter
Articlenumber: 177164 **diff.**
tight 18x2, 120 meter
Articlenumber177166 **diff.**
tight 18x2, 200 meter
Articlenumber: 177168





FLEXRING Set for S-Coupling

Duo ring mounted between two surfaces requiring a liquid-tight seal. Compensates for misalignment, saves time, is reusable, strong and perfectly sealing for many applications.

Articlenumber: 614994



WALRAVEN
McAlpine Space-Saving Washbasin Trap

Membrane opens under water pressure to allow free flow and then closes to block odors and sewer gases. Can be used as a non-return valve to prevent backflow. Functions as a vent.

32 mm
Articlenumber: 295283
40 mm
Articlenumber: 295284



MCALPINE
Space-Saving Bend

Horizontally adjustable; suitable for any trap with a 1.1/2" inlet union.

Outlet 1.1/2"
Articlenumber: 295285
Outlet 40 mm, 90 degrees
Articlenumber: 295286



VIEGA
Space-Saving Furniture Trap 32 mm × 1.1/4"

Moves the trap section close to the wall so it does not obstruct the cabinet drawer.

Articlenumber: 297030



WAVIN
HepVO PP Kit Trap WI 32×5/4"

Wavin HepVO universal trap, plastic, white, for washbasin or sink. Waste plug size 1.1/4", outlet connection with compression ring. Universal outlet positioning.

32 mm
Articlenumber: 297137
40 mm
Articlenumber: 297138



Toilet Discharge Gasket

Toilet socket with extra large offset. 97–107 × 100–110 mm.

Articlenumber: 131520



JOHN GUEST
Speedfit End Cap with Bridge

For connections of designer radiators exiting from the wall. Using these end caps keeps the required connection distance of 50 mm unchanged, so plastering or similar work cannot affect it.

15 mm
Articlenumber: 134910
15 mm + air vent
Articlenumber: 134911
16 mm
Articlenumber: 134914
16 mm + air vent
Articlenumber: 134913



JOHN GUEST
Speedfit End Cap

Reusable end cap for copper and plastic pipes.

- Suitable for multiple disconnect and insert cycles
- No tools required
- Available from 12 to 28 mm

Articlenumber: 134900 t/m 134904



JOHN GUEST
Speedfit T-Piece

Adjustable T-piece for creating a branch in an existing copper or plastic pipe quickly and easily.

- Suitable for multiple disconnect and insert cycles
- Available in 15 and 22 mm

Articlenumber: 134905 t/m 134906



JOHN GUEST Universal Connector

Suitable for all multilayer pipes. No tools required. Fast and safe. Supplied with four sets of support sleeves.

16 mm (10,4-13 mm)
Articlenumber: 134914
20 mm (13,85-16mm)
Articlenumber: 134915

TEGELMAATJE

Practical tool for pavers, landscapers and tilers. Use it for marking up to 60 cm. With guides it can be extended to 1 meter.

Paver, 60 cm
Articlenumber: 900255
Guide set, 100 cm
Articlenumber: 900257



SLIM TUBE

Slim Tube is only 20 mm deep, so far less chiselling and milling are required. The risk of wall damage is minimized. Made of PVC and can be cut to size. Includes transition rubber 40/32 and cap. The oval shape provides a larger volume than round PVC 40 mm. Bend 90° inlet 40 mm internal (trap connection). Bend 90° outlet 50 mm external (drain connection). Length 750 mm, width 65 mm, depth 20 mm.

Articlenumber: 297022







NEDCO

Stainless Steel Outdoor Grate ECO+

An elegantly designed stainless steel wall grille with fixed louvers, suitable for the rectangular Eco+ ventilation duct

- 169x77 mm
- Equipped with a check valve

Articlenumber: 810571

Custom advice

For more information about product applications, contact our product specialists at verkoop@vanwalraven.com or 0297 300 000.